

CD1

Multi-Diaphragm Metering Pump



Video link: 



NEMA 4X

Features

- > Smooth chemical dosing, no pulsation dampener needed
- > Diaphragm Failure Detection (DFD) system senses diaphragm failure
- > Exclusive DiaFlex® Diaphragm guaranteed to last the life of the pump
- > SCADA Inputs include: 4-20mA, Remote Start/Stop
- > Relay outputs: single 250V/3A (DFD) and single solid state (Motor On)

Highlights

Flow range

.004 - 7.70 GPH
.015 - 29.2 LPH

Pressures

Up to 150 PSI
(10.3 bar)

Turndown ratio

2,000 : 1

Exclusive

Diaphragm Failure Detection
(DFD)

Motor

Brushless
DC Motor

Warranty

2 Years

Control Methods


Control Methods	Manual Control	4-20mA Input	Remote Start/Stop	Alarm Output	FVS	Motor Status Output
CD1F	•		•	•	•	•
CD1V	•	•	•	•	•	•



Maximum Working Pressure	Up to 150 psig (10.3 bar)
Maximum Fluid Temperature	Up to 185 °F (85 °C)
Maximum Ambient Temperature	14 °F to 115 °F / -10 °C to 46 °C
Maximum Viscosity	1,000 Centipoise
Maximum Suction Lift	20 ft. at 0 PSI
Operating Voltage Range	100 to 240VAC-50/60Hz
Power Cord Options	115V50/60Hz = NEMA 5/15 (USA)
	230V50/60Hz = NEMA 6/15 (USA)
	220V50/60Hz = CEE 7/VII (EU)
	240V50/60Hz = AS 3112 (Australia/New Zealand)
	230V50/60Hz = BS 1363/A (UK)
Motor	Brushless DC, 50W
Duty Cycle	Continuous
Turndown Ratio	2,000:1, (0.05% – 100%) Max rpm = 100
Maximum Overall Dimensions	9.5" W x 9.5" H x 10.4" D (24.1 W x 24.1 H x 26.4 D cm)
Product Weight	8.5 lb. (3.8 Kg)
Approximate Shipping Dimensions	10.5" W x 11.75" H x 13" D (26.7 W x 29.8 H x 33 D cm)
Approximate Shipping Weight	15.5 lb. (7.0 Kg)
Enclosure	NEMA 4X (IP66), Valox® (PBT)
RoHS Compliant	Yes
Standards	cETLus, CE

Dimensions


Dim	Inch	cm	Dim	Inch	cm
A	9.49"	24.10	F	4.32"	10.98
B	10.15"	25.78	G	6.57"	16.69
C	9.46"	24.02	H	8.87"	22.54
D	7.18"	18.23	I	6.67"	16.94
E	7.18"	18.23			

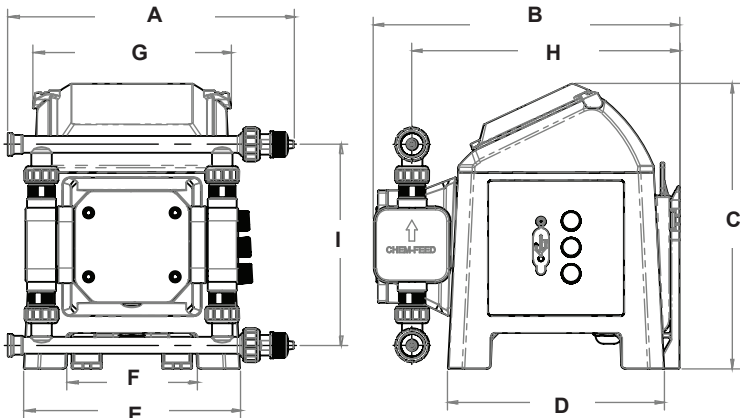

Non-wetted Components:
Enclosure: Valox® (PBT)
Control Panel Cover: Polycarbonate
Drive Enclosure: Valox® (PBT) & PA12
Pump Head Cover: Polycarbonate
Cover Screws: Stainless steel, polypropylene cap
DFD System Sensor Pins: Hastelloy C-276
Power Cord: 3 conductor, SJTW-A water-resistant
Hardware: 316 stainless steel screws
Mounting Brackets: Nylon

Performance

CHEM-FEED® CD1 Metering Pump

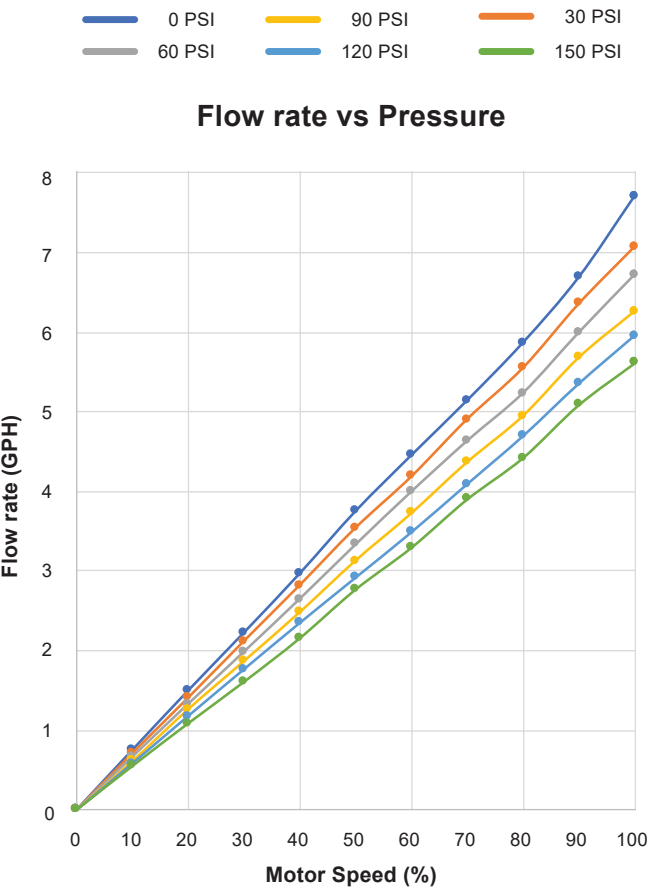

Wetted Components:	Pump Head : PVDF
	Adapter Connections: PVDF
Pump Head Assembly:	Valve Cartridges : PVDF
	Valve Balls : Ceramic
	O-Ring Seals : TFE/P (optional EP)
	Diaphragm : DiaFlex® (optional Flex-A-Prene®)
Ancillary Items Provided:	
	Suction Tubing : 3/8" OD x 1/4" ID x 5' Clear PVC
	Discharge Tubing : 3/8" OD x 1/4" ID x 5' Polyethylene
	Body & Insert : PVDF
Injection / Back-Flow Check Valve:	Check Ball : Ceramic
	Spring : Hastelloy C-276, 6 lbs.
	O-Ring Seals : TFE/P (optional EP)
	Body & Adapter : PVDF
	Check Ball : Ceramic
Foot Valve / Strainer:	Spring : Hastelloy C-276, 6 lbs.
	O-Ring Seals : TFE/P (optional EP)
	Filter Screen : PVDF

Motor Speed	Flow Rate GPH Pressure					
	0 PSI	30 PSI	60 PSI	90 PSI	120 PSI	150 PSI
0%	0	0	0	0	0	0
10%	0.75	0.71	0.67	0.61	0.58	0.55
20%	1.50	1.41	1.33	1.26	1.18	1.09
30%	2.22	2.12	1.98	1.87	1.76	1.61
40%	2.97	2.82	2.65	2.48	2.35	2.16
50%	3.75	3.54	3.33	3.13	2.91	2.77
60%	4.45	4.18	3.99	3.72	3.48	3.29
70%	5.14	4.90	4.63	4.37	4.09	3.90
80%	5.86	5.55	5.23	4.95	4.69	4.42
90%	6.68	6.35	5.99	5.68	5.35	5.08
100%	7.70	7.07	6.71	6.26	5.95	5.61


Model Number Matrix

CD1

CHEM-FEED® Model Number

CD1	CHEM-FEED® Diaphragm Metering Pump (includes 1/4" x 3/8" compression tubing connection for suction/discharge - see accessories for other options)			
Control				
F	Standard Control Methods (Manual, Remote, FVS)			
V	4-20mA Input in addition to Standard Control Methods (Manual, Remote, FVS)			
Diaphragm and O-Rings Material				
V	DiaFlex® Diaphragms and TFE/P O-Rings (For all chemicals excluding caustic soda and aqueous ammonia)			
E	Flex-A-Prene® Diaphragms and EP O-Rings (For caustic soda and aqueous ammonia)			
Power Cord - Removable (Operating voltage requirement 96VAC to 264VAC)				
4	115V 50/60Hz, power cord NEMA 5/15 plug (US)			
6	220V 50/60Hz, power cord CEE 7/V11 plug (EU)			
X	No Power Cord Provided (Power cord is required - See accessories for power cord options)			
CD1	F	V	1	4
Sample Model Number				

Accessories

 KIT-S07 KIT-S15 KIT-S30 * Includes cover and foot valve KIT-S07 (7 Gallon), KIT-S15 (15 Gallon), KIT-S30 (30 Gallon) STAR III TANKS, PP		 KIT-PSM WALL MOUNT BRACKET, HDPE	 KIT-MB FLOOR MOUNTING BRACKETS
Teflon Ball Check Cartridge Valve Kit (PVDF body, TFE/P O-rings, PTFE balls) 4 cartridges included. 20000-177 PTFE Ball Checks	 KIT-C5M 1/2" MNPT Connector Kit	 KIT-C5B HOSE BARB Connector Kit	 KIT-CQA (Aflas) / KIT-CQE (EP) QUICK CONNECT KIT MD1
POWER CABLES - 6 ft 90010-663 115V/60Hz NEMA 5/15 90010-664 220V/50Hz CEE 7/V11 90010-665 230V/50Hz BS 1363/A 90010-666 240V/50Hz AS 3112 90010-696 230V/60Hz NEMA 6/15 USB Cable CABLE-UAC USB A-C 3 ft POWER / USB CABLES	 KIT-M12 TWO M12 CABLES - 9.8 ft	 71000-577 PVDF INJECTOR, 1/2" MNPT	 71000-849 FOOT VALVE, 1/2" MNPT