

CD3

CHEM-FEED® Multi-Diaphragm Metering Pump



Video link:



Features

- > Diaphragm Failure Detection (DFD) system senses diaphragm failure
- > Exclusive DiaFlex® Diaphragm guaranteed to last the life of the pump
- > Smooth chemical dosing, no pulsation dampener needed
- > Multi-diaphragm technology eliminates vapor locking
- > Signal inputs: 4-20mA, Pulse inputs, and Remote start/stop
- > Signal outputs: 4-20mA, Pulse, and 4 programmable relay outputs



NEMA 4X

Highlights

Flow range

0.05 – 52.6 GPH
0.19 – 199 LPH

Pressures

145 PSI
(10 bar)

Turndown ratio

1,000 : 1

Exclusive

Diaphragm Failure Detection
(DFD)

Motor

1/4 HP Brushless
DC Motor

Warranty

2 Years


Control Methods

Control Methods	Manual Control	4-20mA Input	Remote Start/Stop	Pulse Input	Alarm Output	Motor Status Output	0-10VDC
CD3	•	•	•	•	•	•	•



Maximum Working Pressure	145 psig (10 bar)
Maximum Fluid Temperature	185 °F (85 °C)
Maximum Ambient Temperature	14 °F to 115 °F (-10 °C to 46 °C)
Maximum Viscosity	1,000 Centipoise
Maximum Suction Lift	23 ft. Water, 0 psig (7 m, 0 bar)
Operating Voltage	115VAC/60Hz, 1ph (2.0 Amp Maximum)
	230VAC/60Hz, 1ph (1.0 Amp Maximum)
	220VAC/50Hz, 1ph (1.0 Amp Maximum)
	240VAC/50Hz, 1ph (1.0 Amp Maximum)
	230VAC/50Hz, 1ph (2.0 Amp Maximum)
Power Cord Options	115V60Hz = NEMA 5/15 (USA)
	230V60Hz = NEMA 6/15 (USA)
	220V50Hz = CEE 7/VII (EU)
	240V50Hz = AS 3112 (Australia/New Zealand)
	230V50Hz = BS 1363/A plug (United Kingdom)
Duty Cycle	Continuous
Motor	1/4 HP Brushless DC motor
Motor Speed Adjustment Range	1,000:1 (0.1% - 100% motor speed)
Motor Speed Adjustment Resolution	0.1% increments > 10% motor speed
	0.01% increments > 1% motor speed and < 10%
	0.001% increments < 1% motor speed
Display	3 color VGA backlit LCD, UV resistant
Display Languages	English, Spanish, French or German selectable
Keypad	Positive action tactile switch keypad
Security	Programmable 4-digit password
Maximum Overall Dimensions	16-1/8"W x 15-1/4"H x 15-5/16"D (40.9W x 38.7H x 38.9D cm)
Approximate Shipping Weight	53lb. (24.04 Kg)
Enclosure	NEMA 4X (IP66), Polyester powder coated aluminum
RoHS Compliant	Yes
Standards	cETLus, CE

Dimensions

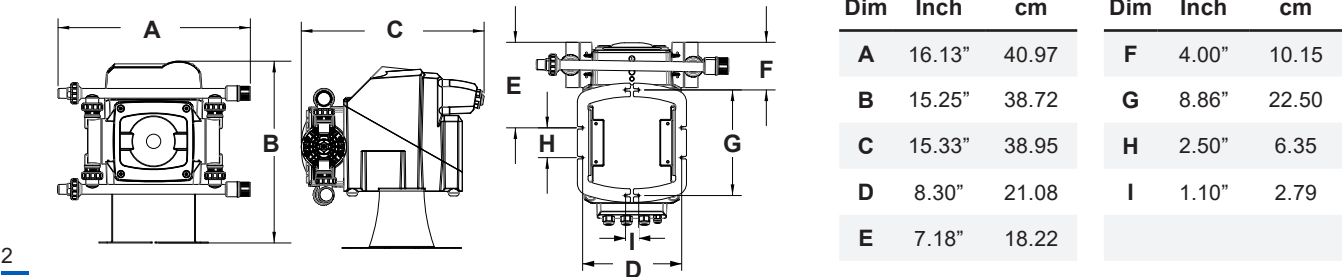


Non-wetted Components:
Enclosure: 413 Aluminum (Polyester powder coated)
Drive Enclosure: Valox (PBT) thermoplastic
Permanently lubricated sealed motor shaft support ball bearing
Drive Enclosure Cover: Polycarbonate
Cover Screws: 300 Series stainless steel, polypropylene cap
Pump Head Cover: 316 Stainless Steel
Motor Shaft: Chrome plated steel
DFD System Sensor pins: Hastelloy C-276
Power Cord: 3 conductor, SJTW-A water-resistant
Mounting Brackets and Hardware: 316 Stainless steel

Performance

CHEM-FEED® CD3 Multi-Diaphragm Metering Pump

0 PSI 40 PSI 90 PSI 140 PSI

Flow Rate vs Pressure

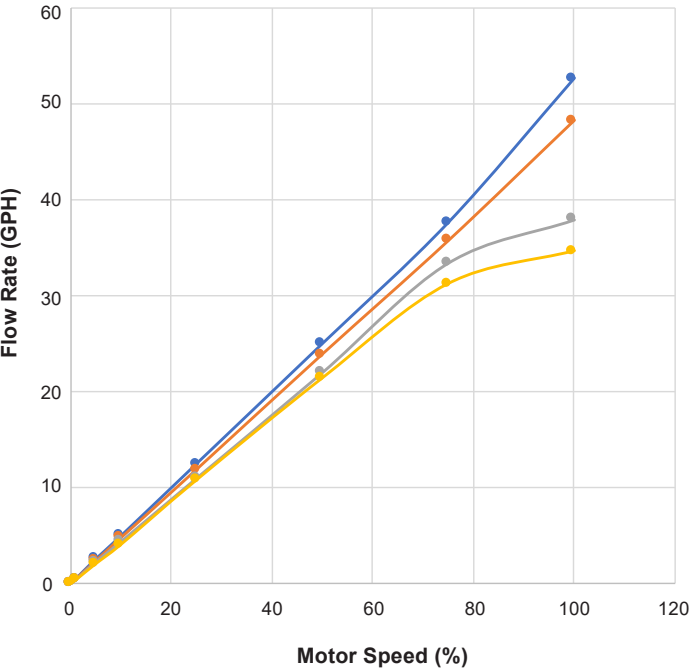

Wetted Components:	Pump Head : PVDF
	Adapter Connections: PVDF
	Valve Cartridges : PVDF
Pump Head Assembly:	Valve Balls : Ceramic
	Elastomers : TFE/P
	Static Seals : TFE/P (optional EP)
	Diaphragm : DiaFlex® (optional Flex-A-Prene®) *
	Body & Insert : PVDF
Injection / Back-Flow Check Valve:	Check Ball : Ceramic
	Spring : Hastelloy C-276, 6 lbs.
	O-Ring Seals : TFE/P (optional EP)
	Body & Adapter : PVDF
	Check Ball : Ceramic
Foot Valve / Strainer:	Spring : Hastelloy C-276, 6 lbs.
	O-Ring Seals : TFE/P (optional EP)
	Filter Screen : PVDF

* Consult factory for chemical compatibility


Motor Speed 190 Strokes/min	RPM	Flow Rate GPH Pressure			
		0 PSIG	40 PSIG	90 PSIG	140 PSIG
0%	0	0	0	0	0
1%	1.3	0.5	0.5	0.4	0.4
5%	10	2.6	2.4	2.3	2.1
10%	19	5.0	4.8	4.4	4.1
25%	48	12.5	11.9	11.0	10.8
50%	95	25.0	23.9	22.0	21.4
75%	142	37.6	35.7	33.4	31.2
100%	190	52.6	48.2	37.9	34.6

*190 Strokes per minute

Multi-Diaphragm Model Number

CD3	CHEM-FEED® Multi-Diaphragm Metering Pump									
	Input Voltage / Power Cord									
	4	115V / 60Hz, power cord NEMA 5/15 plug (US)								
	5	230V / 60Hz, power cord NEMA 6/15 plug (US)								
	6	220V / 50HZ, power cord CEE 7/VII plug (EU)								
	8	240V / 50HZ, power cord AS 3112 plug (Australia/New Zealand)								
	9	230V / 50HZ, power cord BS 1363/A plug (United Kingdom)								
	X	No Power Cord								
		Elastomer Material (O-Rings)								
		V	TFE/P							
		E	EP							
			Options (leave blank for standard model)							
			S	Flex-A-Prene® Diaphragms (Caustic Soda resistant diaphragms)						
CD3	2	4	4	X	V	X	-	A	Sample Model Number	

Accessories

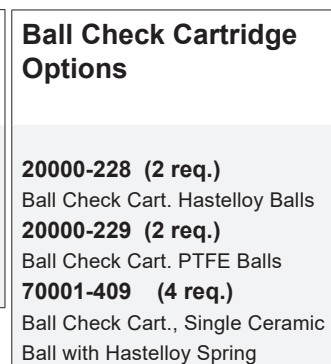

Visit Accessory Pages for More Options