

M2

FLEXFLO® Peristaltic Metering Pump



Features

- > Self priming chemical metering pump delivers smooth chemical feed
- > Patented Tube Failure Detection (TFD) senses tube rupture
- > Signal inputs include: 4-20mA, Pulse Inputs, Frequency Inputs
- > Signal outputs include: Relay (3 amp), 4-20mA, Motor Status



NEMA 4X

Highlights

Flow range

.0085 - 21.23 GPH
.032 - 80.4 LPH

Pressures

125 PSI
(8.6 bar)

Turndown ratio

200 : 1

Exclusive

Tube Failure Detection
(TFD)

Motor

Brushed DC,
1/8 H.P.

Warranty

5 Years

Control Methods

Control Methods	Manual Control	4-20mA Input	Remote Start/Stop	Alarm Output	FVS	Motor Status Output
M2	•	•	•	•	•	•



Maximum Working Pressure (Excluding Pump Tubes)	125 psig (8.6 bar) NOTE: See individual pump tube assembly maximum pressure ratings.
Maximum Fluid Temperature (Excluding Pump Tubes)	3/8" OD x 1/4" ID tubing connections: 130 °F (54 °C) M/NPT connections: 185 °F (85 °C) NOTE: See individual pump tube assembly max. temperature ratings.
Maximum Viscosity	12,000 Centipoise
Maximum Suction Lift	30 ft. Water at sea level (14.7 atm psi)
Maximum Operating Temperature	14 °F to 115 °F (-10 °C to 46 °C)
Maximum Storage Temperature	-40 °F to 158 °F (-40 °C to 70 °C)
Operating Voltage	115VAC/60Hz, 1ph (1.5 Amp Maximum)
	230VAC/60Hz, 1ph (0.7 Amp Maximum)
	220VAC/50Hz, 1ph (1.0 Amp Maximum)
	240VAC/50Hz, 1ph (1.0 Amp Maximum)
Power Cord Options	115V60Hz = NEMA 5/15 (USA)
	230V60Hz = NEMA 6/15 (USA)
	220V50Hz = CEE 7/VII (EU)
	240V50Hz = AS 3112 (Australia/New Zealand)
	230V50Hz = BS 1363/A (UK)
Motor	Brushed DC, 1/8 H.P.
Duty Cycle	Continuous
Motor Speed Adjustment Range	200:1 (0.5% - 100%) Max rpm = 130 rpm
Motor Speed Adjustment Resolution	0.1% increments
Display	Backlit LCD, UV resistant
Keypad	Eight button positive action tactile switch keypad
Maximum Overall Dimensions	7-1/2" W x 10-1/4" H x 14" D (19 W x 26 H x 35.6 D cm)
Product Weight	28.4 lb. (12.9 Kg)
Approximate Shipping Weight	35 lb. (15.9 Kg)
Enclosure	NEMA 4X (IP66), Polyester powder coated aluminum
RoHS Compliant	Yes
Standards	NSF/ANSI 61, cETLus, CE


Output Specifications

Tubing Options	Feed Rate			Max Pressure	Max Temperature
	GPH	LPH	mL/Min	PSI (bar)	°F (°C)
Flex-A-Prene® A2 Tube Pumps					
ND	.01 - 1.7	.03 - 6.5	.54 - 108	125 (8.6)	185 (85)
NEE	.022 - 4.44	.084 - 16.8	1.4 - 280	110 (7.6)	185 (85)
NGG	.086 - 17.2	.325 - 65.1	5.4 - 1085	110 (7.6)	185 (85)
Flex-A-Chem® A2 Tube Pumps					
TH	.07 - 14.3	.27 - 54	4.5 - 900	50 (3.4)	130 (54)
Flex-A-Thane® A2 Tube Pumps					
GE	.02 - 4.0	.08 - 15.2	1 - 253	65 (4.5)	130 (54)
GG	.05 - 9.3	.17 - 35.2	3 - 587	65 (4.5)	130 (54)
GH	.11 - 21.23	.04 - 80.4	6.7 - 1340	65 (4.5)	130 (54)

Non-wetted Components:	Wetted Components:
Enclosure: 413 Aluminum (Polyester powder coated)	Pump Tube Assembly:
Pump Head: Valox® (PBT) thermoplastic	Tubing: Flex-A-Prene®, Flex-A-Chem® or Flex-A-Thane®
Pump Head Cover: Polycarbonate	Adapter Fittings: PVDF
Permanently lubricated sealed motor shaft support ball bearing.	One spare tube included
Cover Screws: Stainless steel	Ancillary Items Not Included (sold separately):
Roller Assembly:	Injection Fitting, Foot Valve/Strainer, Suction Tubing/Pipe, Discharge Tubing/Pipe, Quick Disconnect Valves, or Communications Wire/Cable.
Rotor: Valox® (PBT)	
Rollers: Machined nylon	
Roller Bearings: SS Ball bearings	
Roller Shaft: 316 Stainless steel	
Motor Shaft: Chrome plated steel	
TFD System Sensor: Hastelloy C-276	
Power Cord: 3 conductor, SJTW-A water-resistant	
Tube Installation Tool: GF nylon	
Mounting Brackets and Hardware: 316 Stainless steel	

Dimensions

Dim	Inch	cm	Dim	Inch	cm
A	10-1/4"	26	D	9-1/2"	24.1
B	7-1/2"	19	E	11"	27.9
C	14"	35.6	F	3-3/8"	8.6

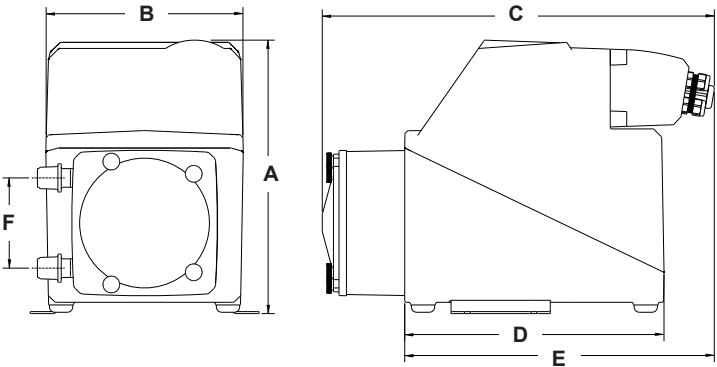


Model Number Matrix

M2

FLEXFLO® Model Number

M2	FLEXFLO® Peristaltic metering pump model number				
Power Cord (operating voltage user selectable 115V/240 Vac 50/60Hz)					
4	115V / 60Hz, power cord NEMA 5/15 plug (US)		8	240V / 50HZ, power cord AS 3112 plug (AU/New Zealand)	
5	230V / 60Hz, power cord NEMA 6/15 plug (US)		9	230V / 50HZ, power cord BS 1363/A plug (United Kingdom)	
6	220V / 50HZ, power cord CEE 7/VII plug (EU)		X	No Power Cord	
Inlet/Outlet Connection Size, Connection Type, Connection Material					
S	3/8" OD x 1/4" ID Tube Compression Fitting, Natural PVDF (Kynar)		C	1/2" - 3/4" Tri-clamp connections, Natural PVDF (Kynar), available for ND, NEE, and NGG only	
M	1/2" Male NPT Fitting, Natural PVDF (Kynar)		Q	Quick Disconnect, Natural PVDF (Kynar), available for NDD, NEE, and NGG only (valve Ns sold seperately)	
B	1/2" Hose Barb, Natural PVDF (Kynar), available for ND, NEE, and NGG only		MB	1/2" Male BSPT Fitting, Natural PVDF (Kynar)	
Pump Tube Material, Pump Tube Size, Output Range					
ND	Flex-A-Prene® .075 ID 0.01-1.7 GPH 125 PSI				
NEE	Flex-A-Prene® .093 ID 0.022-4.44 GPH 110 PSI				
NGG	Flex-A-Prene® .187 ID 0.086-17.2 GPH 110 PSI				
GE	Flex-A-Thane® .125 ID 0.02-4.0 GPH 65 PSI				
GG	Flex-A-Thane® .187 ID 0.05-9.3 GPH 65 PSI				
GH	Flex-A-Thane® .312 ID 0.106-21.23 GPH 65 PSI				
TH	Flex-A-Chem® .250 ID 0.07-14.3 GPH 50 PSI				
Options (leave this blank for standard model with left facing pump head inlet/outlet)					
R	Right facing pump head, input / output (Left facing fluid input / output is standard)				
D	Down facing pump head, input / output (Left facing fluid input / output is standard)				
M2	2	4	S	ND	R
Sample Model Number					

Accessories

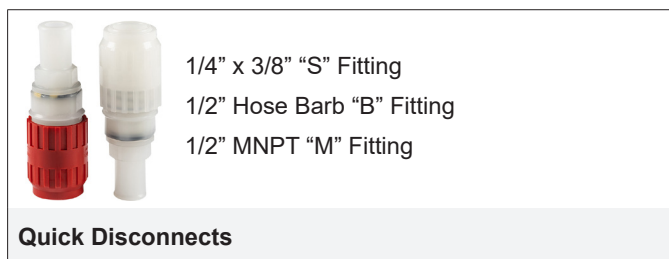

*KIT-QSV FKM O-RINGS *KIT-QBV FKM O-RINGS *KIT-QMV FKM O-RINGS
*KIT-QSE EP O-RINGS *KIT-QBE EP O-RINGS *KIT-QME EP O-RINGS

NOTE: Accessories sold separately.

P.N. 85000-115 M2 REV 3 20221017

5300 Business Drive, Huntington Beach, CA 92649
TEL 714-893-8529 | FAX 714-894-9492 | www.blue-white.com | sales@blue-white.com